

# GENEE POWERBOARD

## Pen and finger board



**CERAMIC COATED SURFACE ON 48", 56", 78" & 105" WHICH CATER FOR ANY DRY MARKER PEN**



**Soft key short cuts!**  
The Genee Powerboard has soft keys on either side which can be easily programmed for regular displays used by the teacher



**USB connection**



**Interactive whiteboard pens**  
The Genee Powerboard comes with 3 interactive pens (red, black and blue) and eraser


You can interact with the Genee Powerboard by using the pens provided, or even your fingers! The soft keys also enable you to programme short cuts for your presentation – making this one of the most affordable and content rich whiteboards around!

### EASY TO USE

Simply touch the Genee Powerboard with the Genee pen and run all computer functions, such as opening files, running digital video clips, or downloading free content from the Internet from the front of the class so there is no need to return to your computer and lose the students' attention.

### Key features

- Using advanced IR technology, the Genee Powerboard recognizes the pen or will recognize your finger and accurately track you anywhere on the screen.
- Available in 48", 56", 78", 88" and 105"
- Surface is durable, cleans up easily and is coated to provide minimal glare.
- Annotate over any application and save your work.
- Select amongst three different pens with unlimited colour choices.
- Designed for distance learning and easily integrates into a complete conference network.
- Supports real time on-screen editing.
- Graphic tools allow you to define background selection and input custom graphics/images.
- Supports third party software applications.
- Create, edit and annotate over live motion video.
- Integrates seamlessly with portable document cameras, Genee Slate – writing tablets and Cens-U's and Genee Pad audience response system.

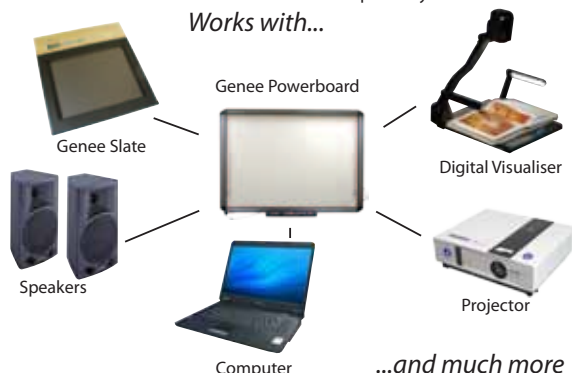

# Specification

GENEE POWERBOARD	48" (ceramic coated)	56" (ceramic coated)	78" (ceramic coated)	88"	105" (ceramic coated)
Technology	Infrared	Infrared	Infrared	Infrared	Infrared
Touch system	Pen, wand or finger	Pen, wand or finger	Pen, wand or finger	Pen, wand or finger	Pen, wand or finger
Widescreen	No	No	No	No	Yes
Touchable range	38" x 28" (962 x 717mm)	46" x 33" (1159 x 831mm)	65" x 46" (1653 x 1159mm)	72" x 52" (1817 x 1323mm)	84" x 46" (2145 x 1159mm)
Resolution	1024 x 1024 pixels	2048 x 2048 pixels	4096 x 4096 pixels	4096 x 4096 pixels	4096 x 4096 pixels
Response time	First dot 25ms, continuous dot 8ms	First dot 25ms, continuous dot 8ms	First dot 25ms, continuous dot 8ms	First dot 25ms, continuous dot 8ms	First dot 25ms, continuous dot 8ms
Cursor speed	120 dots/second	120 dots/second	120 dots/second	120 dots/second	120 dots/second
Co ordinate accuracy	3mm	3mm	3mm	3mm	3mm
Power consumption	≤75mA	≤75mA	≤85mA	≤95mA	≤100mA
Port	USB	USB	USB	USB	USB
Active Area	995 x 717mm	1139 x 811mm	1653 x 1139mm	1817 x 1303mm	2145 x 1139mm
Frame size	1167 x 880 x 38mm	1331 x 971 x 49mm	1824 x 1301 x 49mm	1988 x 1465 x 49mm	2317 x 1301 x 49mm
Packing dimensions	1230 x 1150 x 200mm	1400 x 1100 x 200mm	2080 x 1420 x 95mm	2195 x 1570 x 95mm	2522 x 1500 x 95mm
Net weight	13kg	16kg	26kg	27kg	32kg
Gross weight	19kg	23kg	34kg	37kg	42kg
Operation system	Windows 2000/XP/Vista/7	Windows 2000/XP/Vista/7	Windows 2000/XP/Vista/7	Windows 2000/XP/Vista/7	Windows 2000/XP/Vista/7
Accessories	Standard: 3 interactive pens (red, black and blue), eraser, pen tray Optional: floor stand	Standard: 3 interactive pens (red, black and blue), eraser, pen tray Optional: floor stand	Standard: 3 interactive pens (red, black and blue), eraser, pen tray Optional: floor stand	Standard: 3 interactive pens (red, black and blue), eraser, pen tray Optional: floor stand	Standard: 3 interactive pens (red, black and blue), eraser, pen tray Optional: floor stand
Operating temperature	5°F - 122°F (-15°C - 50°C)	5°F - 122°F (-15°C - 50°C)	5°F - 122°F (-15°C - 50°C)	5°F - 122°F (-15°C - 50°C)	5°F - 122°F (-15°C - 50°C)
Operating humidity	20-90%	20-90%	20-90%	20-90%	20-90%
Storage temperature	-40°F - 122°F (-40°C - 50°C)	-40°F - 122°F (-40°C - 50°C)	-40°F - 122°F (-40°C - 50°C)	-40°F - 122°F (-40°C - 50°C)	-40°F - 122°F (-40°C - 50°C)
Storage humidity	10-95%	10-95%	10-95%	10-95%	10-95%
International board warranty	3 yrs return to base	3 yrs return to base	3 yrs return to base	3 yrs return to base	3 yrs return to base
International surface warranty	25 yrs return to base	25 yrs return to base	25 yrs return to base	25 yrs return to base	25 yrs return to base

Dealer stamp

